

### THINK PARTS THINK TORNOS



# Swiss GT 26 / Swiss GT 13

Your advanced machining solution.

#### Efficient, versatile and easy to use


Highly efficient production of even the most complex parts, thanks to unique B-axis technology, is a hallmark of Tornos' Swiss GT family of automatic turning machines. Available in two diameters—25.4 mm for the Swiss GT 26 mm and 13 mm for the Swiss GT 13—the line is specifically designed to drive your successful production of long and short turned parts, making it a reliable, easyto-use all-rounder that allows you to achieve measurable production improvements. The line's advanced technical features and efficient six-axis kinematics make it ideal for a variety of manufacturing challenges. Modular machining area enabling rotating tools to be fitted according to the requirements of the workpiece

Spindle and counter-spindle offering the same power, torque and clamping forces to facilitate balancing of operations and programming

Machine offers a high level of autonomy, different options are available to increase this autonomy when needed (Chip conveyors, oil mist extractor, part reception devices and bar feeders)

#### Swiss GT 26


- Maximum diameter: 25.4 mm
- Linear axes: 6
- Caxes: 2
- B axis: option
- Maximum number of tools: 40
- Maximum number rotating tool: 14

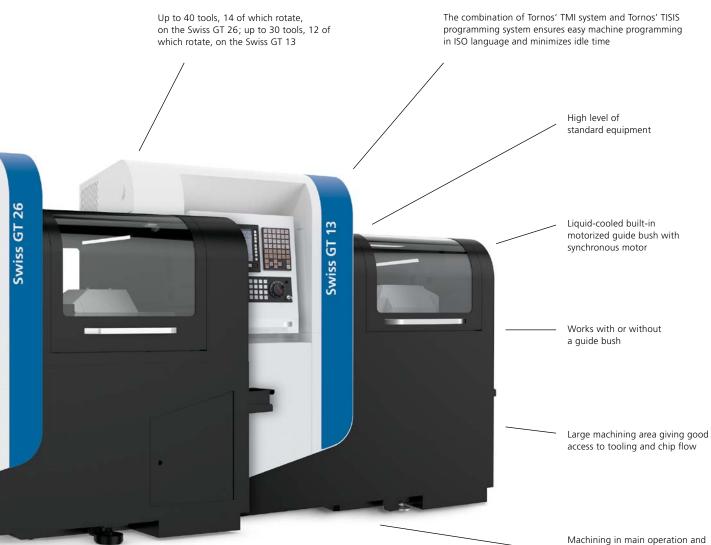

secondary operations can be carried out simultaneously

#### Swiss GT 13

- Maximum diameter: 13 mm
- Linear axes: 6
- Caxes: 2
- Maximum number of tools: 30
- Maximum number rotating tool: 12

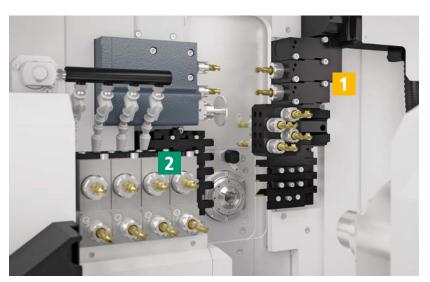



Swiss GT 13/6

Swiss GT 26/6

#### Versatility to meet any challenge

With their very dense tooling capacitiy, these machines position you to tackle the market's most complex parts. Both machines feature a modular tooling position that puts you on the fast track to advanced operations, including thread whirling, polygonal milling and angular milling.

Extending an already impressive flexibility, the Swiss GT 26 can be equipped with a B axis, featuring a patented modular position. As you have come to expect from Tornos machines, both spindles feature the same power in main and counter operations. That means you can program your parts with greater freedom: heavy jobs no longer have to be machined in main operations.

#### 1

Your leading-edge tooling answers for main operations



Polygon unit maximum 6,000 rpm Polygon tool Ø 80 mm

#### 1 2

Your key tooling solutions for main and counter operations



Rotating spindle for milling (63 mm saw)


#### 3

Your advanced tooling solutions for B axis



Double drilling/milling spindle for B axis



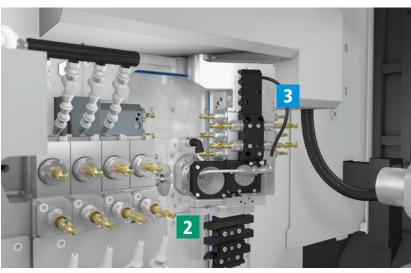

Swiss GT 26 with B axis: Machining of highly complex parts made easy



Thread-whirling unit Maximum 5,700 rpm Angle  $\pm$  25° Ø max. 10 mm



ESX20 drilling/milling spindle (offset 6 mm)



Thread-whirling unit for B axis



Double drilling/milling unit




Inclined drilling/milling device




ESX20 drilling/milling spindle (offset 15 mm)



Slotting device







Support for guide bush, no disconnection of wiring

Taking your turning operation to the next level. Versatility, high performance in value-added operations, and ability to work with or without a guide bush make the Swiss GT 26 and Swiss GT 13 comprehensive bar turning solutions. Your result: easy production of complex parts at a competitive price.

#### **Built for speed**


Everything goes fast. You achieve highest precision and gain precious seconds, thanks to the motorized guide bush supported by the Swiss GT's liquid-cooled, 15,000 rpm\* motor spindle. The direct rotary drive guide bush provides high-speed, accurate machining to reduce your cycle time. A complete solution to tackle every demand

The Swiss GT line is a comprehensive bar turning solution. For instance, each machine features a 20-bar pump with two independent filters. To boost your efficiency on short parts, the Swiss GTs can be converted into guide bushless machines in less than 15 minutes. A handy support for your guide bush can be found right next to the spindle—no cable disconnection required.

#### **Engineered for best ergonomics**

You enjoy a high level of autonomy with the Swiss GT family, thanks to our strong focus on ergonomics. The swarf container can be emptied while the machine is running, and the welllighted and accessible machining area allows very fast setup change over. The numerical control on the swivel arm and the handy toolbox are additional advantages that can't be overlooked.


### SWISS GT 13

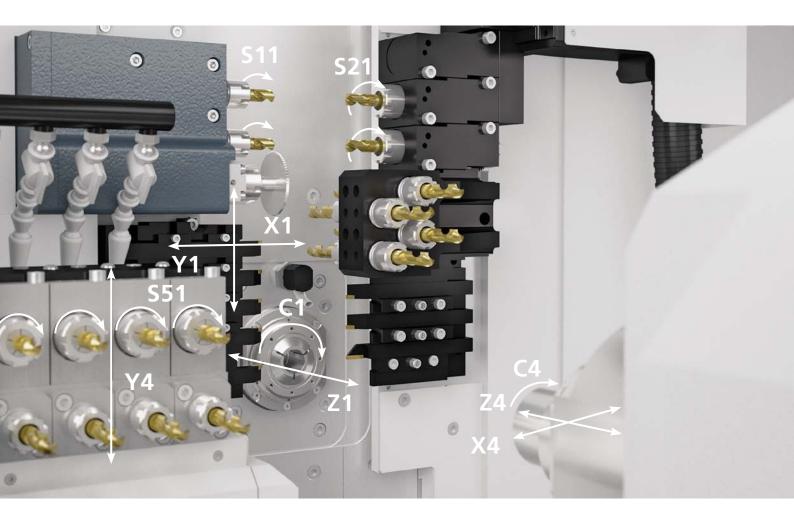

#### Up to 30 tools, including 12 rotating tools

The Swiss GT 13 is equipped with three motors (two on the platten and one for back operation) to drive numerous rotating tools. A modular position is available to accommodate the addition of special attachments. The rotating tools on the rear platten and the counter operation station are easily exchangeable and compatible with the Swiss GT 26.

### SWISS GT 26 EXCEPTIONAL MACHINING PERFORMANCE

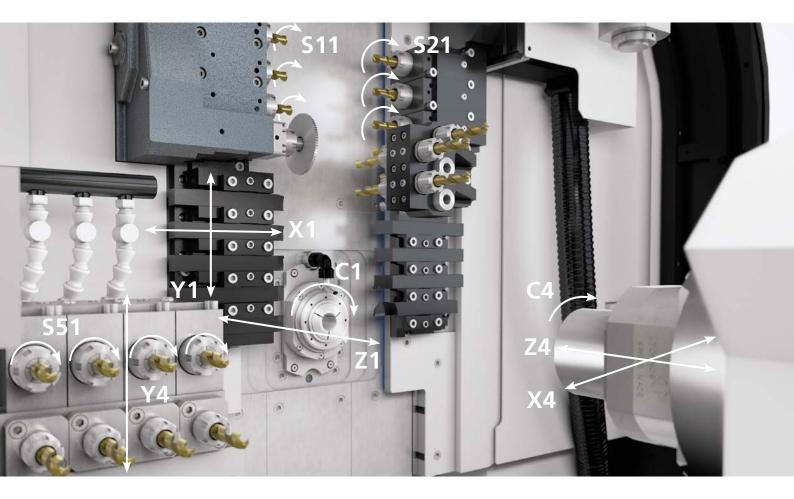




Swiss GT 26 and Swiss GT 26B: Tool block with two bores to accept drill holders for deep drilling

#### Up to 40 tools, including 14 rotating tools

The Swiss GT 26, like the Swiss GT 13, is equipped with three motors (two on the platten and one for back operation) to drive numerous rotating tools. The position on the rear platten is modular, allowing the machine to receive special attachments. The rotating tools on the rear platten and the

counter operation station are easily exchangeable and compatible with Swiss GT 13.

### SWISS GT 26B

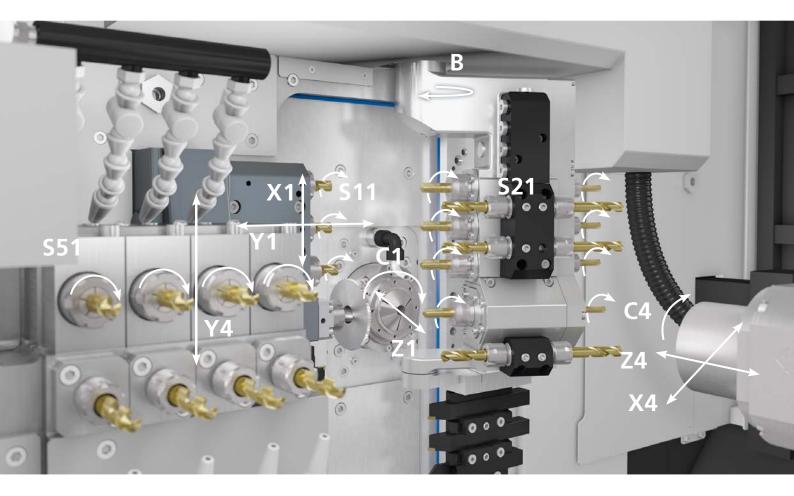

### Swiss GT 26B: Machining of highly complex parts made easy

The innovative design of the Swiss GT 26B accommodates 2x4 rotating spindles with a spindle speed of up to 9,000 rpm. This high-speed driven tool station incorporates a 1 kW spindle motor for machining difficult-to-cut materials and conducting heavy roughing processes. Furthermore, the kinematics of the new Swiss GT 26B provide the facility for 2x4 fixed front tool stations, ensuring that virtually any angle can be indexed or processed by the numerical control (NC) programs.

#### Up to 36 tools, including 16 rotating tools

The Swiss GT 26B features a B axis that includes up to four rotating tools in main operation and the same amount for working in counter operation. It includes a modular position that can accommodate a thread whirler. In addition four fixed positions or high-frequency spindles can be added to this device. Optionally, the Swiss GT 26B can perform continuous live machining (simultaneous 5-axis machining). The live tools mounted on the B axis machine in coordination with the C axis, delivering the ability to cut both precise angles and sculpted contours. This feature transforms this Swiss-type lathe into a high-performance, multitasking turning center that can easily be programmed through our TISIS CAM solution.

# TISIS: PROGRAMMING AND COMMUNICATING WITH YOUR SWISS GT MACHINE

#### **TISIS: Experience programming intelligence**

In today's competitive global marketplace, there's not a moment to waste in meeting customers' demands. Our available TISIS communication and programming software puts you on the fast track to truly effortless programming and realtime process monitoring. TISIS knows your Tornos machine fleet and can help you decide which machine to use for a specific part—and that's not all. It enables you to assess each machine's options, reduces the risk of collisions and resulting stoppages, and improves your production efficiency.

TISIS is a smart and advanced ISO code editor that does the thinking for you. It knows your Tornos machine inventory, can help you write your code, and points out any coding errors. It puts the code in color and can display your program in an attractive, readable Gantt diagram, making it easy for you to see the critical path and react quickly to optimize the process. As an option it is also possible to use our smart TISIS CAM solution is designed to help you master your Tornos machine when it comes to complex and very complex parts. Mastercam for Tornos reduces startup time significantly and, coupled with TISIS, it is the perfect solution for efficiently programming and optimizing parts. At the same time, TISIS takes the complexity out of process monitoring. Even from a remote location, you can keep an eye on the details of the machining process from your smartphone or tablet. The software also allows you to quickly transfer your programs by USB key or directly onto the machine. Your parts designs in various stages of completion can be stored with your program and your parts are easily retrieved from the database.



### HIGH PRECISION



Stainless steel External diameter: 5 mm Workpiece length: 9 mm



Steel External diameter: 15 mm Workpiece length: 12 mm



Titanium External diameter: 4.58 mm Workpiece length: 10.8 mm



Brass External diameter: 5.6 mm Workpiece length: 30 mm



Stainless steel External diameter: 8 mm Workpiece length: 30 mm



Aluminium External diameter: 20 mm Workpiece length: 60 mm



Brass External diameter: 1.6 mm Workpiece length: 35 mm



Stainless steel External diameter: 8 mm Workpiece length: 110 mm



Stainless steel External diameter: 19.7 mm Workpiece length: 43.7 mm

# SWISS GT 26 TECHNICAL CHARACTERISTICS

| TECHNICAL SPECIFICATIONS                             |         | SWISS GT 26/6        | SWISS GT 26B                        |
|--|---------|----------------------|-------------------------------------|
|  | -       | near axes + 2 C-axis | 6 linear axes + 2 C-axis + 1 B-axis |
|  | 2 indep | endent tool systems  | 2 independent tool systems          |
| Main spindle   |         |                      |                                     |
| Max. bar capacity                                    | mm      | 23 (25.4)            | 23 (25.4)                           |
| Standard workpiece length with rotating guide bush   | mm      | 220                  | 220                                 |
| Spindle rotation speed                               | rpm     | 0-10,000             | 0-10,000                            |
| Spindle power  | kW      | 8.2 (10.5)           | 8.2 (10.5)                          |
| Max. torque  | Nm      | 26                   | 26                                  |
| Platten  |         |                      |                                     |
| Max. number of turning tools                         |         | 10                   | 10                                  |
| Turning tool section                                 |         | 16 x 16              | 16 x 16                             |
| Number of frontal tools (op/cop)                     |         | 5/(5)                |                                     |
| Positions for rotating tools (S11)                   |         | 4                    | 4                                   |
| Positions for rotating tools (S21 modular positions) |         | 3                    |                                     |
| Rotating tool speed of rotation                      | rpm     | 5000                 | 5000                                |
| Rotating tool power (S11/S21)                        | kW      | 0.75/1               | 0.75                                |
| B-axis   |         |                      |                                     |
| Number of rotating tool positions S21 (op/cop)       |         |                      | 4/4                                 |
| Number of fix frontal tools (op/cop)                 |         |                      | 4                                   |
| HF spindle   |         |                      | Option                              |
| Thread whirling device                               |         |                      | Option                              |
| Rotating tool speed of rotation                      | rpm     |                      | 9000                                |
| Rotating tool power (S11/S21)                        | kW      |                      | 0.75/1                              |
| Counter spindle                                      |         |                      |                                     |
| Max. bar capacity                                    | mm      | 25.4                 | 25.4                                |
| Insertion length of workpiece into spindle           | mm      | 120                  | 120                                 |
| Max standard output length of workpiece              | mm      | 120                  | 120                                 |
| Spindle rotation speed                               | rpm     | 0-10,000             | 0-10,000                            |
| Spindle power  | kW      | 8.2 (10.5)           | 8.2 (10.5)                          |
| Max. torque  | Nm      | 26                   | 26                                  |
| Number of tool positions next to the counter spindle |         | 2                    | 2                                   |
| Counter operation                                    |         |                      |                                     |
| Number of tool positions                             |         | 8                    | 8                                   |
| Positions for rotating tools                         |         | 4                    | 4                                   |
| Rotating tool speed of rotation                      | rpm     | 5000                 | 5000                                |
| Rotating tool power                                  | kW      | 0.75                 | 0.75                                |
| Total number of tools                                |         | 40                   | 36                                  |
| Operation / counter-operation tool distribution      |         | 27/13                | 23/13                               |

# SWISS GT 26 TECHNICAL CHARACTERISTICS

| TECHNICAL SPECIFICATIONS                              | SWISS GT 26/6              | SWISS GT 26B                        |
|---|----------------------------|-------------------------------------|
|   | 6 linear axes + 2 C-axis   | 6 linear axes + 2 C-axis + 1 B-axis |
|   | 2 independent tool systems | 2 independent tool systems          |
| BASIC MACHINE EQUIPMENT                               |                            |                                     |
| Rotating guide bush with integrated motor             | Х                          | >                                   |
| Machining without guide bush                          | Х                          | >                                   |
| S21 rear platten rotating tool motor                  | Х                          | >                                   |
| S11 front platten rotating tool motor                 | Х                          | >                                   |
| S51 rotating tool motor in counter-operation          | Х                          | >                                   |
| C1 + C4 axes  | Х                          | >                                   |
| Interpolation in polar coordinates                    | Option                     | Optior                              |
| Pneumatic workpiece ejector + oil cleaning of collet  | Х                          | X                                   |
| Automatic centralised lubrication cycle               | Х                          | X                                   |
| Beacon (4 colour)                                     | Х                          | X                                   |
| 20 bar lubrication pump with manual selection filters | Х                          | X                                   |
| Bar feeder interface                                  | Х                          | X                                   |
| Fire extinguisher interface                           | Х                          | X                                   |
| TISIS programming software                            | Option                     | Optior                              |
| Simultaneous 5-axis machining                         | _                          | Optior                              |


| Control type                     | Fanuc 31iB        | Fanuc 31iB*       |
|----------------------------------|-------------------|-------------------|
| Encoder/axis motor technique     | Absolute serial   | Absolute serial   |
| Motor type (axes and guide bush) | Synchronous (AC)  | Synchronous (AC)  |
| Motor type (spindles)            | Asynchronous (AC) | Asynchronous (AC) |

#### PROGRAMMING SOFTWARE

ISO language code C, TMI

\* Fanuc 31iB-5 with option simultaneous 5-axis machining

# SWISS GT 26 TECHNICAL CHARACTERISTICS

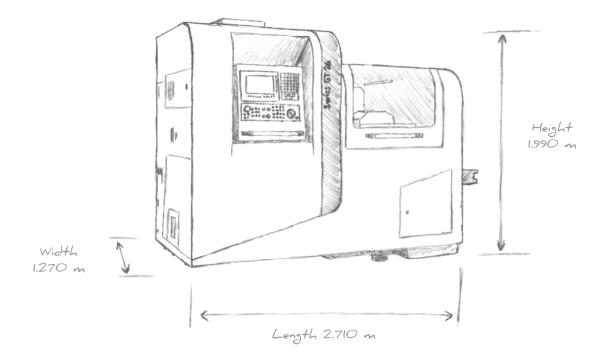

| GENERAL SPECIFICATIONS                |    | SWISS GT 26 | SWISS GT 26B |
|---------------------------------------|----|-------------|--------------|
| Max. length                           | mm | 2710        | 2710         |
| Max. width                            | mm | 1270        | 1270         |
| Height                                | mm | 1990        | 1990         |
| Weight                                | kg | 3550        | 3550         |
| Cutting oil tray capacity             |    | 200         | 200          |
| Coolant pump power                    | kW | 0.44        | 0.44         |
| Colours RAL 9006 grey, RAL 9011 black |    |             |              |
| CE/CEM certified                      |    |             |              |

# SWISS GT 13 TECHNICAL CHARACTERISTICS

| TECHNICAL SPECIFICATIONS                             |     | SWISS GT 13/6              |
|--|-----|----------------------------|
|  |     | 6 linear axes + 2 C-axis   |
|  |     | 2 independent tool systems |
| Main spindle   |     |                            |
| Max. bar capacity                                    | mm  | 10 (13)                    |
| Standard workpiece length with rotating guide bush   | mm  | 190                        |
| Spindle rotation speed                               | rpm | 0-15,000                   |
| Spindle power  | kW  | 4.0 (8.0)                  |
| Torque   | Nm  | 12                         |
| Platten  |     |                            |
| Max. number of turning tools                         |     | 8                          |
| Turning tool section                                 |     | 12 x 12                    |
| Number of frontal tools (op/cop)                     |     | 4/4                        |
| Positions for rotating tools (S11)                   |     | 3                          |
| Positions for rotating tools (S21 modular positions) |     | 2                          |
| Rotating tool speed of rotation                      | rpm | 6000 (10,000)              |
| Rotating tool power (S11/S21)                        | kW  | 1                          |
| Counter spindle                                      |     |                            |
| Max. bar capacity                                    | mm  | 13                         |
| Insertion length of workpiece into spindle           | mm  | 80                         |
| Max standard output length of workpiece              | mm  | 90                         |
| Spindle rotation speed                               | rpm | 0-15,000                   |
| Spindle power  | kW  | 4.0 (8.0)                  |
| Max. constant torque                                 | Nm  | 10/26                      |
| Counter operation                                    |     |                            |
| Number of tool positions                             |     | 8                          |
| Positions for rotating tools                         |     | 4                          |
| Rotating tool speed of rotation                      | rpm | 6000                       |
| Rotating tool power                                  | kW  | 0.75                       |
| Total number of tools                                |     | 30                         |
| Operation / counter-operation tool distribution      |     | 18/12                      |
|  |     |                            |

# SWISS GT 13 TECHNICAL CHARACTERISTICS

| TECHNICAL SPECIFICATIONS                              | SWISS GT 13/6              |
|---|----------------------------|
|   | 6 linear axes + 2 C-axis   |
|   | 2 independent tool systems |
| BASIC MACHINE EQUIPMENT                               |                            |
| Rotating guide bush with integrated motor             | Х                          |
| Machining without guide bush                          | Х                          |
| S21 rear platten rotating tool motor                  | Х                          |
| S11 front platten rotating tool motor                 | Х                          |
| S51 rotating tool motor in counter-operation          | Х                          |
| C1 + C4 axes  | Х                          |
| Interpolation in polar coordinates                    | Option                     |
| Pneumatic workpiece ejector + oil cleaning of collet  | Х                          |
| Automatic centralised lubrication cycle               | Х                          |
| Beacon (4 colour)                                     | Х                          |
| 20 bar lubrication pump with manual selection filters | Х                          |
| Bar feeder interface                                  | Х                          |
| Fire extinguisher interface                           | Х                          |
| TISIS programming software                            | Option                     |


#### NUMERICAL CONTROL

| Control type                              | Fanuc 31iB        |
|---|-------------------|
| Encoder/axis motor technique              | Absolute serial   |
| Motor type (axes and guide bush)          | Synchronous (AC)  |
| Motor type (spindles)                     | Asynchronous (AC) |
| Colour screen and mobile operator console |                   |

#### PROGRAMMING SOFTWARE

ISO language code C, TMI

# SWISS GT 13 TECHNICAL CHARACTERISTICS

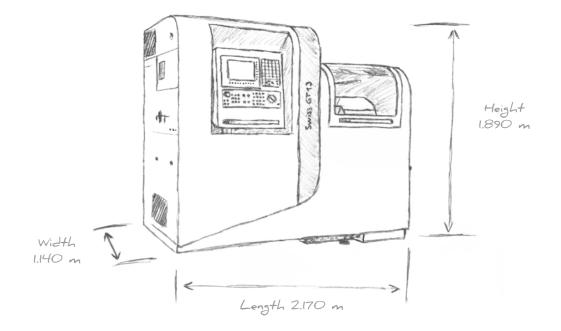

| GENERAL SPECIFICATIONS                |    | SWISS GT 13 |
|---------------------------------------|----|-------------|
| Max. length                           | mm | 2170        |
| Max. width                            | mm | 1140        |
| Height                                | mm | 1890        |
| Weight                                | kg | 2800        |
| Cutting oil tray capacity             |    | 200         |
| Coolant pump power                    | kW | 0.44        |
| Colours RAL 9006 grey, RAL 9011 black |    |             |
| CE/CEM certified                      |    |             |

### TORNOS SERVICE

Backed by both geographical proximity to customers and a keen understanding of their processes, applications and market challenges, Tornos Service delivers unparalleled continuity of support: start-up assistance; expert training and coaching; free hotline; on-site operations support and preventive maintenance; original spare parts seamlessly delivered worldwide; complete overhauls to extend the longevity of Tornos machines; and a range of operations and X-change Modules to expand your application capabilities and profitability. Buying a Tornos machine is much more than a business transaction. It is your investment in the future. Tornos Service thrives worldwide by securing the predictably high production capability of products carrying the Tornos name. Situated close to you, as demonstrated by the 12 Tornos Service Centers strategically located across Europe, Asia, and the Americas, Tornos Service offers a full continuum of authoritative support for you and your Tornos machines, and encompasses the innovation, reliability and attention to detail expected of a premier Swiss brand. And it is all backed by a 100-year legacy of expertise and in-depth understanding of customers' processes, applications and challenges across a wide range of industrial segments, including automotive, medical, electronics and connections, and micromechanics.

#### Start-up assistance

From the first feasibility tests prior to purchase, you are in good hands with Tornos Service. In our state-of-the-art Techno Centers, expert application engineers support you with tests to gauge the feasibility of machining processes and applications. With start-up assistance, you are secure in the knowledge that you will never be left alone to deal with a brand new machine.

#### Expert training and coaching

Engineered for intuitive and easy use, Tornos machines offer a vast range of options and enable myriad processes. Expert training and coaching help your employees become programming, handling and maintenance experts, adding more value to your processes, applications and products.



### TORNOS SERVICE





#### **Hotline support**

Wherever you are in the world, highly qualified specialists who speak your language and understand your processes are just a phone call away to quickly support you with handling and programming solutions.

#### **On-site support**

Fast, efficient on-site operations and preventive maintenance ensure the continuous high performance of your Tornos machines. Regular scheduled preventive maintenance can help you avoid 70 percent of machine breakdowns and keep you on the path to productivity.

#### Certified original spare parts

Rapid, reliable, worldwide delivery of certified original Tornos spare parts is a specialty of Tornos Service. Regardless of the age of the your Tornos machine, we stock the essential certified spare parts to keep the machine running at peak performance.

#### Machine overhauls

Tornos machines inspire confidence, so it's no surprise that many customers turn to Tornos for complete overhaul of their workhorse machines. Tornos overhaul service returns the machines in good-as-new condition, appreciably extending their longevity.

#### **Options, upgrades and X-change Modules**

To help you achieve your manufacturing, productivity and quality objectives, our experts collaborate with you to manage complex machining processes, develop software features for machining complex shapes, design special equipment, and tailor peripherals to customers' needs. Tornos' X-change Modules expand your application capabilities and profitability.



#### TORNOS SA

Rue Industrielle 111 CH-2740 Moutier T +41 (0)32 494 44 44 F +41 (0)32 494 49 03 contact@tornos.com www.tornos.com

#### TORNOS TECHNOLOGIES

DEUTSCHLAND GmbH Karlsruher Str. 38 D - 75179 Pforzheim T +49 (0)7231 / 910 70 F +49 (0)7231 / 910 750 contact-ttd@tornos.com

#### TORNOS TECHNOLOGIES FRANCE

Boîte postale 330 St-Pierre en Faucigny F - 74807 La Roche s / Foron Cedex T +33 (0)4 50 038 333 F +33 (0)4 50 038 907 france.contact@tornos.com

#### TORNOS TECHNOLOGIES IBÉRICA

Pol. Ind. El Congost Avda. St Julià, 206 Nave 8 E-08403 Granollers T +34 93 846 59 43 F +34 93 849 66 00 comercial.tti@tornos.com

#### TORNOS TECHNOLOGIES ITALIA SRL

Via Cesare Pavese 21 I-20090 Opera / MI T +39 02 57 68 15 01 F +39 02 57 68 15 230 italia.contact@tornos.com

#### TORNOS TECHNOLOGIES US CORPORATION

840 Parkview Boulevard US - Lombard, IL 60148 T +1 630 812 2040 F +1 630 812 2039 info-us@tornos.com www.tornos.us

### TORNOS TECHNOLOGIES

Tornos House Whitwick Business Park Coalville UK - Leicestershire LE67 4JQ T +44 (0) 1530 513100 F +44 (0) 1530 814212 sales@tornos.co.uk

#### TORNOS TECHNOLOGIES

POLAND Sp. z o.o. Ul. Spółdzielcza 37-39 55-080 Kąty Wrocławskie Poland T +48 71 33 85 618 F +48 71 33 85 617 poland.contact@tornos.com

#### TORNOS TECHNOLOGIES (Shanghai) LTD

Hui Feng Creativity Garden Feng Yu Building, 1-2F No. 239, Xitai Rd, Xu Hui District CN-Shanghai 200232 T +86 21 6235 1235 F +86 21 6235 1938 china.contact@tornos.com

#### TORNOS DONGGUAN OFFICE

SE1-29, Changrong International Machinery Hardware Square, No.56 Middle ZhenAn Road, Wusha, ChangAn Town, Dongguan City, Guandong Province, 523859 T +86-769-8533 7266 F +86-769-8533 7265 china.contact@tornos.com

#### TORNOS BEIJING OFFICE

Rm.1706, Tower A Dongyu Office Building Jia #1 Shuguang Xili Chaoyang District CN-Beijing 100028 T +86 10 5979 8583 F +86 10 5822 0483 beijing.contact@tornos.com

#### TORNOS SA THAILAND REPRESENTATIVE OFFICE

Th Floor, 19, Bangna -Trad Soi 34, Bangna -Trad KM. 3 Road. Bangna, Bangkok, 10260 Thailand T +66 2746 8840-1 F +66 2746 8842 thailand.contact@tornos.com

#### TORNOS TECHNOLOGIES ASIA LTD MALAYSIA

#### REPRESENTATIVE OFFICE

No. 1-1-11, Ground Floor & 1-2-11, First Floor, One Terrace Plus, Tingkat Mahsuri 4, 11900 Bayan Lepas, PENANG, MALAYSIA T +60 4 642 6562 / 4 642 6563 F +60 4 642 6561 malaysia.contact@tornos.com

#### Conforms to the European CE/CEM Safety Standards

This document is based on information available at the time of publication. While every effort has been made to be accurate, the information contained herein does not purport to cover all details or variations in hardware and software, nor to provide for every possible contingency in connection with installation, operation and maintenance. TORNOS SA assumes no obligation of notice to holders of this document with respect to changes subsequently made. TORNOS SA makes no representation or warranty, expressed, implied, or statutory with respect to, and assumes no responsibility for the accuracy, completeness, sufficiency or usefulness of the information contained herein. No warranties of merchantability nor fitness for purpose shall apply.

E